


10-03-00



PATENT

Docket No. 1232-4650

Express Mail Label No. EL513415420US

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

**UTILITY APPLICATION AND APPLICATION FEE TRANSMITTAL (1.53(b))**

COMMISSIONER FOR PATENTS

Box Patent Application  
Washington, D.C. 20231

Sir:

Transmitted herewith for filing is the patent application of

Named Inventor(s) and  
Address(es):

Kiyoshi KANEKO, 1-9-706, Namiki 2-chome, Kanazawa-ku, Yokohama-shi,  
Kanagawa-ken, Japan; Tadashi YAMAMOTO, 28-1-806, Minamiyoshidamachi 2-  
chome, Minami-ku, Yokohama-shi, Kanagawa-ken, Japan; and Akihiko NAKATANI,  
16-8-104, Idasanmaicho, Nakahara-ku, Kawasaki-shi, Kanagawa-ken, Japan

For: IMAGE READING APPARATUS AND METHOD AND STORAGE MEDIUM  
Enclosed are:

☒ 35 page(s) of specification, 1 page(s) of Abstract, 15 page(s) of claims

☒ 10 sheets of drawing ☒ formal ☐ informal

☐      Page(s) of Declaration and Power of Attorney

☐ Unsigned

☐ Newly Executed

☐ Copy from prior application

☐ Deletion of inventors including Signed Statement under 37 C.F.R. § 1.63(d)(2)

☒ Incorporation by Reference: The entire disclosure of the priority application(s) identified below, is considered as being part of the disclosure of the accompanying application and is incorporated herein by reference.

☐ Microfiche Computer Program (Appendix)

☐      page(s) of Sequence Listing

☐ computer readable disk containing Sequence Listing

☐ Statement under 37 C.F.R. § 1.821(f) that computer and paper copies of the Sequence Listing are the same

☒ Claim for Priority Japanese Application No 11-285942 filed 10/6/99 and 2000-261617 filed 8/30/00

- ☐ Certified copy of Priority Document(s)
  - ☐ English translation documents
- ☐ Information Disclosure Statement
  - ☐ Copy of 1 Cited reference
  - ☐ Copy of PTO-1449 filed in parent application serial No. \_\_\_\_\_.
- ☐ Preliminary Amendment
- ☒ Return receipt postcard (MPEP 503)
- ☐ Assignment Papers (assignment cover sheet and assignment documents)
  - ☐ A check in the amount of \$40.00 for recording the Assignment.
  - ☐ Assignment papers filed in parent application Serial No. \_\_\_\_\_.
  - ☐ Certification of chain of title pursuant to 37 C.F.R. § 3.73(b).
- ☐ This is a ☐ continuation ☐ divisional ☐ continuation-in-part (C-I-P) of prior application serial no. \_\_\_\_\_.
- ☐ Cancel in this application original claims \_\_\_\_\_ of the parent application before calculating the filing fee. (At least one original independent claim must be retained for filing purposes.)
- ☐ A preliminary Amendment is enclosed. (Claims added by this Amendment have been properly numbered consecutively beginning with the number following the highest numbered original claim in the prior application.
- ☐ The status of the parent application is as follows:
  - ☐ A Petition For Extension of Time and a Fee therefor has been or is being filed in the parent application to extend the term for action in the parent application until \_\_\_\_\_.
  - ☐ A copy of the Petition for Extension of Time in the co-pending parent application is attached.
  - ☐ No Petition For Extension of Time and Fee therefor are necessary in the co-pending parent application.
- ☐ Please abandon the parent application at a time while the parent application is pending or at a time when the petition for extension of time in that application is granted and while this application is pending has been granted a filing date, so as to make this application co-pending.
  - ☐ Transfer the drawing(s) from the patent application to this application.
- ☐ Amend the specification by inserting before the first line the sentence:  
This is a ☐ continuation ☐ divisional ☐ continuation-in-part of co-pending application Serial No. \_\_\_\_\_ filed \_\_\_\_\_.

## I. CALCULATION OF APPLICATION FEE (For Other Than A Small Entity)

|                           |              |      |                    | Basic Fee |             |
|---------------------------|--------------|------|--------------------|-----------|-------------|
|                           | Number Filed |      | Number Extra       | Rate      | \$          |
| Total                     |              |      |                    |           | \$ 710.00   |
| Claims                    | 37           | -20= | 17                 | x\$18.00  | \$ 306.00   |
| Independent               |              |      |                    |           |             |
| Claims                    | 26           | - 3= | 23                 | x80.00    | \$ 1,840.00 |
| Multiple Dependent Claims |              |      |                    |           |             |
|                           | [ ] yes      |      | Additional Fee =   |           |             |
|                           | [ X ] no     |      | Add'l Fee = 270.00 |           | NONE        |
|                           |              |      |                    |           | \$ 0        |

Total: \$2,856.00

- [ ] A statement claiming small entity status is attached or has been filed in the above-identified parent application and its benefit under 37 C.F.R. § 1.28(a) is hereby claimed. Reduced fees under 37 C.F.R. § 1.9(F) (50% of total) paid herewith \$ \_\_\_\_\_.
- [ X ] A check in the amount of \$2,856.00 for payment of the application filing fees is attached.
- [ ] Charge Fee(s) to Deposit Account No. 13-4500. Order No. \_\_\_\_\_. A DUPLICATE COPY OF THIS SHEET IS ATTACHED.
- [ X ] The Assistant Commissioner is hereby authorized to charge any additional fees which may be required for filing this application, or credit any overpayment to Deposit Account No. 13-4500, Order No. 1232-4650. A DUPLICATE COPY OF THIS SHEET IS ATTACHED.

Respectfully submitted,

MORGAN &amp; FINNEGAN, L.L.P.

By: Michael M. Murray  
Registration No 32,537

Dated: October 2, 2000

CORRESPONDENCE ADDRESS  
MORGAN & FINNEGAN, L.L.P.  
345 Park Avenue  
New York, New York 10154  
(212) 758-4800  
(212) 751-6849 Facsimile

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**



Applicants : Kiyoshi KANEKO et al.  
Serial No. : To Be Assigned Examiner: To Be Assigned  
Filed : October 2, 2000 (Herewith) Group Art Unit: TBA  
For : IMAGE READING APPARATUS AND METHOD AND STORAGE MEDIUM

**EXPRESS MAIL CERTIFICATE**

Express Mail Label No. EL513415420US

Date of Deposit October 2, 2000

I hereby certify that the following attached paper(s) and/or fee  
Application Fee Transmittal (in duplicate); 35 pp. of specs., 1 page of abstract, 15 pp claims (37 TOTAL  
claims); 10 Sheets of Formal Drawings (Figs. 1-10); Check in the amount of \$2,856.00 (filing fee); and  
return receipt postcard

is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37

C.F.R. §1.10 on the date indicated above and is addressed to the Commissioner for Patents, Box New Applications,

Washington, D.C. 20231.

\_\_\_\_\_  
Francisco J. Garcia

Typed or printed name of person  
mailing paper(s) and/or fee)

\_\_\_\_\_  
*Francisco J. Garcia*  
(Signature of person mailing  
paper(s) and/or fee)

CORRESPONDENCE ADDRESS:  
MORGAN & FINNEGAN, L.L.P.  
345 Park Avenue  
New York, New York 10154  
(212) 758-4800  
(212) 751-6849 Facsimile

## TITLE OF THE INVENTION

IMAGE READING APPARATUS AND METHOD AND STORAGE MEDIUM

## FIELD OF THE INVENTION

5           The present invention relates to an image reading apparatus mounted on a printer so as to be interchangeable with a printhead, an image reading method, and a storage medium.

## 10   BACKGROUND OF THE INVENTION

General ink-jet printers have served only as printers equipped with printheads to print images.

In contrast to this, a printer also having a scanner function by detachably mounting an image reading apparatus  
15   (scanner unit) on the carriage unit of the printer is known (see, for example, Japanese Patent Publication Nos. 1-20832, 2-21712, and 2-21711).

An image reading apparatus for outputting image data in one output form such as a serial output or 8-bit parallel  
20   output form has been used.

When the read data amount varies for each resolution, however, since the conventional image reading apparatus having only one output form has a low degree of flexibility in processing speed, power consumption associated with the  
25   processing speed, noise removing effect, and the like, high-precision image read cannot be performed.

More specifically, the image data read by the sensor in a required storage time must be transmitted as digital data. However, since an optimal combination of power consumption, processing speed, noise prevention, and the like cannot be selected, complicated control processing is required, resulting in low processing speed.

In addition, it is difficult to process noise based on digital signal processing and superimposed on an analog signal as a sensor output, i.e., noise (fixed noise) based on digital signal processing in a so-called analog/digital signal hybrid circuit. For this reason, high-precision image read cannot be performed.

#### SUMMARY OF THE INVENTION

It is an object of the present invention to provide an image reading apparatus and method which can read a high-quality image with a high precision and high S/N ratio by canceling out noise based on digital signal processing and superimposed on the effective portion of an analog signal.

In order to solve the above problems and achieve the above object, an image reading apparatus of the present invention is characterized by the following arrangement according to its first aspect.

There is provided an image reading apparatus for outputting a difference between read data acquired by

reading an image and reference data acquired by reading a  
reference image as image data, comprising resolution setting  
means for setting a resolution in the image read, read data  
acquiring means for acquiring the read data in number  
5 corresponding to the set resolution, output clock generating  
means for generating an output clock for outputting the image  
data in the image read, dummy clock generating means for  
generating a dummy clock for the output clock when the  
reference data is to be acquired by reading the reference  
10 image, and timing setting means for matching a timing of the  
output clock with a timing of the dummy clock in an interval  
during which the image is read and read data is output.

An image reading apparatus of the present invention  
is characterized by the following arrangement according to  
15 its second aspect.

There is provided an image reading apparatus which is  
mounted on a printer so as to be interchangeable with a  
printhead, comprising image read means for reading an image  
of an original placed on said printer, output means capable  
20 of outputting the read image data in a serial output form  
and a plurality of parallel output forms, and output form  
selecting means for selecting the output form.

An image reading apparatus of the present invention  
is characterized by the following arrangement according to  
25 its third aspect.

There is provided an image reading apparatus which is

mounted on a printer so as to be interchangeable with a  
printhead, comprising image read means for reading an image  
of an original placed on said printer, clock generating means  
for generating an output clock for outputting the read image  
5 data, and clock frequency changing means for changing a  
frequency of the output clock.

An image reading apparatus of the present invention  
is characterized by the following arrangement according to  
its fourth aspect.

10 There is provided an image reading apparatus which is  
mounted on a printer so as to be interchangeable with a  
printhead, comprising image read means for reading an image  
of an original placed on said printer, and driving frequency  
changing means for changing a driving frequency for said  
15 image read means.

An image reading method of the present invention is  
characterized by the following process according to its  
first aspect.

There is provided an image reading method of  
20 outputting a difference between read data acquired by  
reading an image and reference data acquired by reading a  
reference image as image data, comprising the step of setting  
a resolution in the image read, the step of acquiring the  
read data in number corresponding to the set resolution, the  
25 step of generating an output clock for outputting the image  
data in the image read, the step of generating a dummy clock



for the output clock when the reference data is to be acquired by reading the reference image, and the step of matching a timing of the output clock with a timing of the dummy clock in an interval during which the image is read and read data is output.

An image reading apparatus of the present invention is characterized by the following arrangement according to its fifth aspect.

There is provided an image reading apparatus comprising image read means for reading an image, serial output means for outputting the image data read by said image read means in a serial form, and a plurality of parallel output means for outputting the image data read by said image read means in a plurality of types of parallel forms.

An image reading apparatus of the present invention is characterized by the following arrangement according to its sixth aspect.

There is provided an image reading apparatus comprising image read means for reading an image, clock generating means for generating a clock signal for outputting the image data read by said image read means, and clock changing means for changing a frequency of the clock signal in accordance with the read resolution of said image read means.

An image reading apparatus of the present invention is characterized by the following arrangement according to

its seventh aspect.

There is provided an image reading apparatus for outputting a difference between read data acquired by reading an image and reference data acquired by reading a reference image as image data, comprising image read means for reading an image, output clock generating means for generating an output clock signal for outputting the image data read by said image read means, and dummy clock generating means for generating a dummy clock similar to the output clock signal when the reference image is to be read.

An image reading apparatus of the present invention is characterized by the following arrangement according to its eighth aspect.

There is provided an image reading apparatus comprising image read means for reading an image, and driving frequency changing means for changing a driving frequency for a photoelectric conversion sensor mounted in said image read means.

An image reading apparatus of the present invention is characterized by the following arrangement according to its ninth aspect.

There is provided an image reading apparatus for outputting a difference between read data acquired by reading an image and reference data acquired by reading a reference image as image data, comprising image read means for reading an image, serial output means for outputting the

image data read by said image read means in a serial form,  
a plurality of parallel output means for outputting the image  
data read by said image read means in a plurality of types  
of parallel forms, switching means for switching said  
5 plurality of parallel output means, output clock generating  
means for generating an output clock signal for outputting  
the image data read by said image read means, output clock  
changing means for changing a frequency of the output clock  
signal, dummy clock generating means for generating a dummy  
10 clock similar to the output clock signal when the reference  
image is to be read, and driving frequency changing means  
for changing a driving frequency for a photoelectric  
conversion sensor mounted in said image read means, wherein  
fixed noise is removed from an output signal from said  
15 photoelectric conversion sensor by using said serial output  
means, said parallel output means, said switching means,  
said output clock generating means, said output clock  
changing means, said dummy clock generating means, and said  
driving frequency changing means.

20       An image reading apparatus of the present invention  
is characterized by the following arrangement according to  
its tenth aspect.

      There is provided an image reading apparatus for  
outputting a difference between read data acquired by  
25 reading an image and reference data acquired by reading a  
reference image as image data, comprising image read means

for reading an image output clock generating means for  
generating an output clock signal for outputting the image  
data read by said image read means, clock changing means for  
changing a frequency of the clock signal in accordance with  
5 a read resolution of said image read means, and dummy clock  
generating means for generating a dummy clock having the same  
frequency as that of the output clock signal which is changed  
by said clock changing means when the reference image is to  
be read.

10 An image reading method of the present invention is  
characterized by the following process according to its  
second aspect.

There is provided an image reading method comprising  
the image read step of reading an image, and the step of  
15 selecting one of output means in a serial form and output  
means in a plurality of types of parallel forms to output  
the image data read in the image read step.

An image reading method of the present invention is  
characterized by the following process according to its  
20 third aspect.

There is provided an image reading method comprising  
the image read step of reading an image, the clock generating  
step of generating a clock signal for outputting the image  
data read in the image read step, and the clock changing step  
25 of changing a frequency of the clock signal in accordance  
with a read resolution in the image read step.

An image reading method of the present invention is characterized by the following process according to its fourth aspect.

There is provided an image reading method of  
5 outputting a difference between read data acquired by  
reading an image and reference data acquired by reading a  
reference image as image data, comprising the image read step  
of reading an image, the output clock generating step of  
generating an output clock signal for outputting the image  
10 data read in the image read step, and the dummy clock  
generating step of generating a dummy clock similar to the  
output clock signal when the reference image is to be read.

An image reading method of the present invention is characterized by the following process according to its  
15 fifth aspect.

There is provided an image reading method comprising  
the image read step of reading an image by using image read  
means, and the driving frequency changing step of changing  
a driving frequency for a photoelectric conversion sensor  
20 mounted in the image read means.

An image reading method of the present invention is characterized by the following process according to its sixth aspect.

There is provided an image reading method of reading  
25 an image by using an image reading apparatus which outputs  
a difference between read data acquired by reading an image

and reference data acquired by reading a reference image as  
image data and includes image read means for reading an image,  
serial output means for outputting the image data read by  
the image read means in a serial form, a plurality of parallel  
5 output means for outputting the image data read by the image  
read means in a plurality of types of parallel forms,  
switching means for switching the plurality of parallel  
output means, output clock generating means for generating  
an output clock signal for outputting the image data read  
10 by the image read means, output clock changing means for  
changing a frequency of the output clock signal, dummy clock  
generating means for generating a dummy clock similar to the  
output clock signal when the reference image is to be read,  
and driving frequency changing means for changing a driving  
15 frequency for a photoelectric conversion sensor mounted in  
the image read means, comprising removing fixed noise  
from an output signal from the photoelectric conversion  
sensor by using the serial output means, the parallel output  
means, the switching means, the output clock generating  
20 means, the output clock changing means, the dummy clock  
generating means, and the driving frequency changing means.

An image reading method of the present invention is  
characterized by the following process according to its  
seventh aspect.

25 There is provided an image reading method comprising  
the image read step of reading an image, the clock generating

step of generating a clock signal for outputting the image data read in the image read step, and the removing step of removing the image data in a portion where a read timing of image data in the image read step differs from a timing of the clock signal for outputting the image data.

An image reading method of the present invention is characterized by the following process according to its eighth aspect.

There is provided an image reading method of outputting a difference between read data acquired by reading an image and reference data acquired by reading a reference image as image data, comprising the image read step of reading an image, the output clock generating step of generating an output clock signal for outputting the image data read in the image read step, the clock changing step of changing a frequency of the clock signal in accordance with a read resolution of the image read means, and the dummy clock generating step of generating a dummy clock having the same frequency as that of the output clock signal which is changed in the clock changing step when the reference image is to be read.

A storage medium of the present invention is characterized by the following arrangement according to its first aspect.

There is provided a storage medium storing a control program for controlling an image reading apparatus, wherein

the control program comprises a code for the image read step of reading an image, and a code for the step of selecting one of output means in a serial form and output means in a plurality of types of parallel forms to output the image data  
5 read in the image read step.

A storage medium of the present invention is characterized by the following arrangement according to its second aspect.

There is provided a storage medium storing a control  
10 program for controlling an image reading apparatus, wherein the control program comprises a code for the image read step of reading an image, a code for the clock generating step of generating a clock signal for outputting the image data read in the image read step, and a code for the clock changing  
15 step of changing a frequency of the clock signal in accordance with a read resolution in the image read step.

A storage medium of the present invention is characterized by the following arrangement according to its third aspect.

20 There is provided a storage medium storing a control program for controlling an image reading apparatus for outputting a difference between read data acquired by reading an image and reference data acquired by reading a reference image as image data, wherein the control program  
25 comprises a code for the image read step of reading an image, a code for the output clock generating step of generating



an output clock signal for outputting the image data read in the image read step, and a code for the dummy clock generating step of generating a dummy clock similar to the output clock signal when the reference image is to be read.

5           A storage medium of the present invention is characterized by the following arrangement according to its fourth aspect.

          There is provided a storage medium storing a control program for controlling an image reading method, wherein the  
10       control program comprises a code for the image read step of reading an image by using image read means, and a code for the driving frequency changing step of changing a driving frequency for a photoelectric conversion sensor mounted in the image read means.

15           A storage medium of the present invention is characterized by the following arrangement according to its fifth aspect.

          There is provided a storage medium storing a control program for controlling an image reading apparatus which  
20       outputs a difference between read data acquired by reading an image and reference data acquired by reading a reference image as image data and includes image read means for reading an image, serial output means for outputting the image data read by the image read means in a serial form, a plurality  
25       of parallel output means for outputting the image data read by the image read means in a plurality of types of parallel

forms, switching means for switching the plurality of  
parallel output means, output clock generating means for  
generating an output clock signal for outputting the image  
data read by the image read means, output clock changing means  
5 for changing a frequency of the output clock signal, dummy  
clock generating means for generating a dummy clock similar  
to the output clock signal when the reference image is to  
be read, and driving frequency changing means for changing  
a driving frequency for a photoelectric conversion sensor  
10 mounted in the image read means, wherein the control program  
comprises a code for the step of removing fixed noise from  
an output signal from the photoelectric conversion sensor  
by using the serial output means, the parallel output means,  
the switching means, the output clock generating means, the  
15 output clock changing means, the dummy clock generating  
means, and the driving frequency changing means.

A storage medium of the present invention is  
characterized by the following arrangement according to its  
sixth aspect.

20 There is provided a storage medium storing a control  
program for controlling an image reading apparatus, wherein  
the control program comprises a code for the image read step  
of reading an image, a code for the clock generating  
step of generating a clock signal for outputting the image  
25 data read in the image read step, and a code for the removing  
step of removing the image data in a portion where a read

timing of image data in the image read step differs from a timing of the clock signal for outputting the image data.

A storage medium of the present invention is characterized by the following arrangement according to its  
5 seventh aspect.

There is provided a storage medium storing a control program for controlling an image reading apparatus for outputting a difference between read data acquired by reading an image and reference data acquired by reading a  
10 reference image as image data, wherein the control program comprises a code for the image read step of reading an image, a code for the output clock generating step of generating an output clock signal for outputting the image data read in the image read step, a code for the clock changing step  
15 of changing a frequency of the clock signal in accordance with a read resolution of the image read means, and a code for the dummy clock generating step of generating a dummy clock having the same frequency as that of the output clock signal which is changed in the clock changing step when the  
20 reference image is to be read.

Other objects and advantages besides those discussed above shall be apparent to those skilled in the art from the description of a preferred embodiment of the invention which follows. In the description, reference is made to  
25 accompanying drawings, which form a part hereof, and which illustrate an example of the invention. Such example,

however, is not exhaustive of the various embodiments of the invention, and therefore reference is made to the claims which follow the description for determining the scope of the invention.

5

#### BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a block diagram showing the arrangement of an ink-jet printer;

Fig. 2 is a view showing the arrangement of the main  
10 part of a printing mechanism unit;

Fig. 3 is a timing chart showing changes in signals at the respective units in image read operation;

Fig. 4 is a block diagram showing the arrangement of part of an image processing IC 21;

Fig. 5 is a timing chart showing changes in signals  
15 at the respective units in data output operation;

Fig. 6 is a timing chart showing clock output timings in reference data acquiring operation and clock output timings in image read operation in a case wherein  
20 appropriate timings are selected/set for each resolution by selecting the number of data output terminals;

Fig. 7 is a timing chart showing clock output timings in reference data acquiring operation and clock output timings in image read operation in a case wherein  
25 appropriate timings are selected/set for each resolution by selecting a data clock frequency for each resolution;

Fig. 8 is a timing chart showing clock output timings in reference data acquiring operation and clock output timings in image read operation in a case wherein a sensor driving frequency is selected/set for each resolution such that appropriate timings are set by changing the driving frequency for a sensor 18 for each resolution;

Fig. 9 is a timing chart showing changes in signals at the respective units in a case wherein the timing of a time Tsd cannot be properly set for a sensor output signal 33; and

Fig. 10 is a view for explaining a dummy data output block.

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

An image reading apparatus and method according to an embodiment of the present invention will be described. The image reading apparatus according to this embodiment is applied to an ink-jet printer, on which the image reading apparatus is mounted so as to be interchangeable with a printhead.

#### [First Embodiment]

Fig. 1 is a block diagram showing the arrangement of an ink-jet printer. This ink-jet printer includes an apparatus body 4 connected to a printhead 1 through an interface 10, and a printhead 1 and scanner unit 16 which are interchangeably connected to a head connection unit 2.

The apparatus body 4 includes the head connection unit 2, a head connection line 3, a controller 5, motor drivers 6 and 7, an arithmetic control unit 8, a sensor 9, the interface (I/F) 10, a CR motor 12, an LF motor 14, an A/D converter 24, a memory 25, and the like.

The scanner unit 16 includes a light source 17, sensor 18, A/D converter 20, image processing IC 21, and oscillator 26.

In the ink-jet printer having this arrangement, print data such as character and image data is transferred from the host computer 11 through the interface (I/F) 10 under the control of the host computer 11 and arithmetic control unit 8. Upon reception of print data, the controller 5 processes the data to print it on printing paper (not shown) by using the printhead 1. The controller 5 sends the print data to the printhead 1 through the head connection line 3 and head connection unit 2 under the control of the arithmetic control unit 8, thereby printing characters, images, and the like on printing paper by using the printhead 1.

Fig. 2 is a view showing the arrangement of the main part of a printing mechanism unit. A cylindrical body 15 is a platen which is rotated by a driving mechanism (not shown) controlled by the arithmetic control unit 8, controller 5, and motor driver 6 after a printing paper sheet is brought into rolling contact with the platen. This

platen feeds the printing paper sheet and serves as a printing base for supporting the printing paper sheet.

A carriage 13 is disposed near the outer surface of the platen 15 so as to be movable along the axial direction  
5 of the platen 15. The carriage 13 holds the printhead 1 in printing operation and the scanner unit (image reading apparatus) 16 (to be described later) in image read operation, and carries them along a printing paper sheet and the surface of an image read original. The carriage  
10 13 is moved by a carriage driving mechanism unit (not shown) controlled by the arithmetic control unit 8, controller 5, and motor drivers 6 and 7.

The sensor 9 detects whether a printing paper sheet or image read original is set on a paper base (not shown)  
15 or the carriage 13 is at the start position. Printing operation is performed by using this printing mechanism unit.

When this apparatus (ink-jet printer) operates as an image reading apparatus, the scanner unit 16 scans an  
20 original (not shown) like the printhead 1 in printing operation.

The scanner unit 16 illuminates the original with light from the light source 17 and detects light reflected by a character or image through the sensor 18 having a  
25 photoelectric conversion feature. The amplifier 19 amplifies the image signal detected by the sensor 18 to an

optimal level at which the signal can be treated by the A/D  
converter 20, and inputs the amplified signal to the A/D  
converter 20. The digital data converted by the A/D  
converter 20 is subjected to correction such as shading  
5 correction (unevenness correction) or binarization or  
image processing in the image processing IC 21. The  
resultant data is then transferred as image data to the  
apparatus body 4.

In this data transfer, the data is sent to the host  
10 computer 11 through a reverse route to the flow of print  
data in printing operation. More specifically, the image  
data is sent from the image processing IC 21 to the host  
computer 11 through the head connection line 3, controller  
5, and interface 10. In this case, the controller 5  
15 converts the form of the image data received from the image  
processing IC 21 into a form that allows the data to be easily  
sent through the interface 10 or a form that allows data  
to be easily handled by the host computer 11, and transfers  
the data under the control of the arithmetic control unit  
20 8.

To read an image, the printing mechanism unit  
operates in almost the same manner as in printing operation.  
More specifically, an image read original is brought into  
rolling contact with the platen 15, and the platen 15 is  
25 rotated by the driving mechanism (not shown) to feed the  
original as in printing operation. The platen 15 also



serves as an original base for supporting the original. The carriage 13 on which the scanner unit 16 is mounted conveys the scanner unit 16 along the surface of the image read original to read an image. As in printing operation, the carriage 13 is driven by the carriage driving mechanism unit (not shown). The sensor 9 operates in the same manner as described above. As described above, in image read operation as well, the printing mechanism unit operates in the same manner as in printing operation.

Fig. 3 is a timing chart showing changes in signals at the respective units in image read operation. In image read operation, an LNST signal 30 supplied from the apparatus body 4 and used to set a read cycle and storage time becomes a temporal reference signal for the operation of each block.

This LNST signal 30 is generated by the arithmetic control unit 8 and controller 5 in the apparatus body 4, and is input to the image processing IC 21 through the head connection unit 2. The image processing IC 21 has the oscillator 26. All logic operations in the scanner unit 16 are performed in synchronism with clock pulses from the oscillator 26. More specifically, the LNST signal 30 input to the image processing IC 21 synchronizes clock pulses from the oscillator 26, and the image processing IC 21 generates a signal  $\phi$  ROG 31 for driving the sensor 18.

At the same time, the image processing IC 21 generates

a clock  $\phi$  CLK 32 for driving the sensor 18, and sends it to the sensor 18, together with the signal  $\phi$  ROG 31. The clock  $\phi$  CLK 32 and signal  $\phi$  ROG 31 are synchronous with each other. In a cycle of the signal  $\phi$  ROG 31, the sensor 18 reads, for example, a white image, and outputs a corresponding sensor output signal 33. A portion S0 of the sensor output signal 33 in Fig. 3 is the information signal read by the sensor 18 in a storage time T0. The sensor output signal 33 is a signal for outputting 1-pixel information per clock pulse of the clock  $\phi$  CLK 32. If the sensor 18 is a 256-pixel sensor and the clock  $\phi$  CLK 32 is a 1-MHz clock, the sensor output signal 33 is kept output for 256 pixels  $\times$  (1/1 MHz) = 256  $\mu$ sec. Likewise, if the clock  $\phi$  CLK 32 is a 2-MHz clock, the sensor output signal 33 is kept output for 256 pixels  $\times$  (1/2 MHz) = 128  $\mu$ sec.

A plurality of clock frequencies can be selected for the clock  $\phi$  CLK 32 in accordance with an instruction such as register setting instruction from the arithmetic control unit 8 to the image processing IC 21. Fig. 4 is a block diagram showing the arrangement of part of the image processing IC 21. The image processing IC 21 includes a DTCK clock generation block/frequency selection block 51, output terminal selection block 52, register block 53, sensor driving clock generation block/frequency selection block 54, and the like. A clock frequency is selected from the clock  $\phi$  CLK 32 by instructing the sensor driving clock

generation block/frequency selection block 54 to set a register value.

The sensor output signal 33 is an analog signal having a level of about several mV to several ten mV. This sensor  
5 output signal 33 is amplified by the amplifier 19 to an appropriate level for conversion from an analog signal to a digital signal. The amplified signal is converted into digital data by the A/D converter 20. The digital data is input to the image processing IC 21. The image processing  
10 IC 21 performs image data processing such as unevenness correction, and outputs the resultant data.

In this case, the image processing IC 21 has eight output terminals to allow 1-bit output as a serial output form and 2-bit output, 4-bit output, and 8-bit output as  
15 parallel output forms.

In selecting one of these output forms, the number of output terminals is set for the image processing IC 21 in accordance with an instruction such as a register setting instruction from the arithmetic control unit 8 or  
20 controller 5. By selecting a plurality of output terminals as needed, an output time for a data output 1 signal 34 can be selected in accordance with the number of output terminals. More specifically, the data output 1 signal 34 is selected for 1-bit output. If a data output 2 signal  
25 35 for 2-bit output is selected, data output operation can be completed in 1/2 the time required for the data output

1 signal 34. Likewise, the time required for data output operation can be decreased to 1/4 if 4-bit output is selected, and decreased to 1/8 if 8-bit output is selected.

In addition, a plurality of clock frequencies can be  
5 selected for a clock DTCK 36 in data output operation. The clock DTCK 36 is kept output for a time equivalent to the number of clock pulses corresponding to the data amount of data output. Assume that the clock DTCK 36 for the data  
10 output 1 signal 34 is a clock that can be output at a frequency of 2 MHz. In this case, if the clock frequency is set to 4 MHz, data transfer can be performed in 1/2 the time as in the case of a clock DTCK 37.

As in the data output terminal selecting/setting operation, this clock frequency selecting/setting  
15 operation is performed for the DTCK clock generation block/frequency selection block 51 of the image processing IC 21 in accordance with an instruction such as a register setting instruction from the arithmetic control unit 8 or controller 5.

20 Data output operation in acquiring reference data (reference image read data) from a white correction plate will be described next. If, for example, a reference image such as a white correction plate is read in acquiring reference data, the acquired reference data is directly  
25 stored in a reference data memory (not shown) in the image processing IC 21. That is, in reading reference data, no

data output and data output clock DTCK are required for an output such as a data output terminal. For this reason, acquired reference data is read out from the reference data memory.

5           As described above, however, the sensor output signal 33 is an analog signal having only an output voltage of about several mV to several ten mV, and hence is susceptible to disturbances. Spike-like noise produced by a data output and data output clock DTCK, in particular, affects the power  
10   supply system and ground system, and is superimposed on the output waveform of the sensor output signal 33. It is known that this noise itself is difficult to remove.

          In order to eliminate the influences of such noise, the data output clock DTCK is also output as a pseudo dummy  
15   clock in reference data acquiring operation as in normal image read operation. In this manner, as in image read operation, almost identical noise is also superimposed on the sensor output signal 33 in reference data acquiring operation to cancel out (remove) spike-like noise (fixed  
20   noise) produced by the data output clock DTCK.

          That is, normal image read data expresses the difference between the level of the sensor output signal 33 in reference data acquiring operation and the level of the sensor output signal 33 in image read operation  
25   (unevenness correction or the like in the image processing IC 21), and hence image read data is output while fixed noise

produced by the data output clock DTCK is removed.

The generation of this dummy clock is set in the register block 53 in the image processing IC 21 by the arithmetic control unit 8, and the dummy clock is output  
5 from the DTCK clock generation block/frequency selection block 51.

As described above, this apparatus is configured to select the number of data output bits, select a data clock frequency, select a sensor driving frequency, and generate  
10 a dummy clock in reference data acquiring operation. A method of removing digital-based data and data-clock-based fixed noise which are superimposed on an output signal from the sensor 18 in this arrangement will be described.

This fixed noise removing method has been described  
15 to a certain degree in association with the description about the arrangement capable of generating a dummy clock in reference data acquiring operation, but will be described again. Fig. 5 is a timing chart showing changes in signals at the respective units in data output operation.

20 A time Tsd is produced as a signal output timing, in which output operation is performed at the same timing in an image read data output time Td as in an output time Ts of the sensor output signal 33. Digital-based data and data-clock-based fixed noise are superimposed on the sensor  
25 output signal 33 in this time Tsd.

In this case, in reference data acquiring operation

as well, digital-based data and data-clock-based fixed noise are superimposed on the sensor output signal 33 to obtain a data output whose fixed noise is canceled out when the image read data is output. In reference data acquiring operation, reference data is acquired throughout all the pixels (256 pixels) of the sensor 18. In image read operation, however, the number of image data varies depending on the read resolution. In this embodiment, for example, since the sensor 18 and optical system are based on a reference resolution of 720 dpi, when a reduced resolution, e.g., 360 dpi, 180 dpi, or 90 dpi is to be obtained, the image processing IC 21 performs averaging processing for pixel data from 720-dpi read data.

Providing that multivalued data consists of 8 bits, the number of image data in one read cycle at each resolution is:

at 720 dpi,  $256 \text{ pixels} \times 8 \text{ bits} = 2,048 \text{ data}$   
at 360 dpi,  $256 \text{ pixels} \times (1/2) \times 8 \text{ bits} = 1,024 \text{ data}$   
at 180 dpi,  $256 \text{ pixels} \times (1/4) \times 8 \text{ bits} = 512 \text{ data}$   
at 90 dpi,  $256 \text{ pixels} \times (1/8) \times 8 \text{ bits} = 256 \text{ data}$

The number of data in image read operation may greatly differ from that in reference data acquiring operation depending on the resolution, and the dummy clock output timing in reference data acquiring operation may differ from the data output timing in image read operation (see Fig. 5).

According to the first method of matching these timings, the number of data output terminals is selected to set the 2-bit output form as a parallel output form so as to set the data output time to 1/2 the time required for the 1-bit output form as a serial output form. Likewise, the 4-bit output form is set to decrease the data output time to 1/4, or the 8-bit output form is set to decrease the data output time to 1/8. With this operation, appropriate timings are selected/set for each resolution, with the clock output timing in reference data acquiring operation matching the data/clock output timing in image read operation. Fig. 6 is a timing chart showing clock output timings in reference data acquiring operation and clock output timings in image read operation in a case wherein appropriate timings are selected/set for each resolution by selecting the number of data output terminals. Since different data amounts are set for the respective resolutions in image read operation, output timings can be matched by selecting/setting the number of output bits.

According to the second method, timings are matched by selecting a data clock frequency for each resolution. For example,

a clock frequency of 8 MHz is selected for 720 dpi,  
a clock frequency of 4 MHz is selected for 360 dpi,  
a clock frequency of 2 MHz is selected for 180 dpi,  
and



a clock frequency of 1 MHz is selected for 90 dpi. With this operation, the times Tsd are set to the same timing, thus appropriate timings are selected/set for each resolution, with the clock output timing in reference data acquiring operation matching the clock output timing in image read operation. Fig. 7 is a timing chart showing clock output timings in reference data acquiring operation and clock output timings in image read operation in a case wherein appropriate timings are selected/set for each resolution by selecting a data clock frequency for each resolution.

Since different data amounts are set for the respective resolutions in image read operation, output timings can be matched by selecting/setting data output clocks (DTCK). In this case, a clock for reference data in reference data acquiring operation is also output as a dummy clock, and hence a data output clock having a frequency selected for each resolution in image read operation is output.

According to the third method, timings are matched by changing the driving frequency for the sensor 18 for each resolution. For example,

a sensor driving frequency of 1 MHz is selected/set for 360 dpi, and

a sensor driving frequency of 2 MHz is selected/set for 180 dpi.

With this operation, as shown in Fig. 8, a time Ts360 and time Td360 at 360 dpi are prolonged. However, both times Tsd in the case of 360 dpi and the case of 180 dpi with a time Ts180 and time Td180 are set to the same timing.

5 Therefore, a sensor driving frequency is selected/set for each resolution to set appropriate timings with the clock output timing in reference data acquiring operation matching the clock output timing in image read operation. Fig. 8 is a timing chart showing a clock output timing in  
10 reference data acquiring operation and a clock output timing in image read operation in a case wherein a sensor driving frequency is selected/set for each resolution so as to set appropriate timings by changing the driving frequency for the sensor 18 for each resolution.

15 In this manner, high-precision, high-quality image read can be performed by selecting/setting an appropriate combination of the first, second, and third methods for each resolution in consideration of power consumption, noise removal ratio, radiation noise occurrence state, and the  
20 like.

[Second Embodiment]

The second embodiment will exemplify the case wherein noise based on digital signal processing cannot be canceled out. When the measures described in the first embodiment  
25 cannot be taken as in a case wherein only the 1-bit output form is set because the number of data output terminals is

limited by the space, cost, and the like of the apparatus,  
the optimal timing of a time Tsd may not be provided for  
a sensor output signal 33, as shown in Fig. 9. Fig. 9 is  
a timing chart showing changes in signals at the respective  
5 units in a case wherein the optimal timing of the time Tsd  
cannot be provided for the sensor output signal 33.

Referring to Fig. 9, in an interval Tnsd, only the  
noise in a reference data clock becomes noise based on  
digital signal processing, and hence clock noise in image  
10 read operation cannot be canceled out by a dummy clock in  
reference data acquiring operation.

If, however, the image read data in the interval Tnsd  
in which this noise cannot be canceled out is not used as  
output data, i.e., processed as invalid data to use only  
15 the portion in which noise is canceled out as final image  
data, image read with a high precision and high S/N ratio  
can be realized, with the noise canceled out. Such invalid  
data processing is performed by an arithmetic control unit  
8 and controller 5 in an apparatus body 4.

20 [Third Embodiment]

In the first and second embodiments, the method of  
setting a proper sensor signal output timing for data output  
in image read operation by outputting a dummy clock in  
reference data acquiring operation has been described. A  
25 method of improving the noise removing effect will be  
described below.

As described above, in image read operation, as a data clock frequency in data output, an optimal frequency is selected for each resolution.

In this case, therefore, the frequency of a dummy data clock output in reference data acquiring operation is set to the same data clock frequency set for each resolution in image read operation when reference data for each resolution is acquired.

With this operation, as described above, noise (fixed noise) in a sensor output signal influenced by data clocks in image read operation and reference data acquiring operation can be canceled out, thus improving the noise removing effect.

As shown in Fig. 4, this dummy clock is output from the DTCK clock generation block/frequency selection block described above after a dummy clock frequency is set by the arithmetic control unit 8 through the register block 53 in the image processing IC 21 in the same manner as described above.

[Fourth Embodiment]

A method of improving the noise removing effect by outputting dummy data as well as a dummy data clock in reference data acquiring operation will be described below.

The method of removing noise by outputting only a dummy data clock has been described above. In actual image read operation, data is always output. More specifically,

output data consist of various combinations of "0s" and "1s" instead of all "0s" or all "1s" as in a case wherein data is output to a data output terminal in reference data acquiring operation. If, therefore, dummy data is output to the data output terminal in reference data acquiring operation as well, a state can be produced, which is as close to the state of data and the data clock output in image read operation as possible. This improves the noise removing effect.

As shown in Fig. 10, this dummy data is set by an arithmetic control unit 8 through a register block 53 in an image processing IC 21 and output from a dummy data generation block 55 as in the same manner described above. [Fifth Embodiment]

In the fourth embodiment, there is no description of the contents of dummy data to be output in reference data acquiring operation. If, however, random signals are generated and reference values obtained by acquiring reference data a plurality of number of times are averaged, the noise removing effect can be improved.

In addition, the noise removing effect can be improved by outputting a pattern of alternately outputting "0" and "1" and a pattern of alternately outputting "1" and "0" as dummy data a plurality of number of times, acquiring reference data a plurality of number of times in the same manner as described above, and averaging the reference data.

That is, patterns that produce a state which is as close to the state in image read operation as possible are output as dummy data.

[Other Embodiments]

5           The objects of the respective embodiments are also achieved by supplying a storage medium (or recording medium), which records a program code of a software program that can realize the functions of the above-mentioned embodiments to the system or apparatus, and reading out and executing the  
10   program code stored in the storage medium by a computer (or a CPU or MPU) of the system or apparatus. In this case, the program code itself read out from the storage medium realizes the functions of the above-mentioned embodiments, and the storage medium which stores the program code constitutes the  
15   present invention. The functions of the above-mentioned embodiments may be realized not only by executing the readout program code by the computer but also by some or all of actual processing operations executed by an OS (operating system) running on the computer on the basis of an instruction of  
20   the program code.

          Furthermore, the functions of the above-mentioned embodiments may be realized by some or all of actual processing operations executed by a CPU or the like arranged in a function extension board or a function extension unit,  
25   which is inserted in or connected to the computer, after the program code read out from the storage medium is written in

a memory of the extension board or unit.

As has been described above, according to the first to fifth embodiments, a high-quality image can be read with a high precision and high S/N ratio by canceling out noise based on digital signal processing which is superimposed on an effective portion of an analog signal. In addition, energy savings and reduction in radiation noise can be achieved.

The present invention is not limited to the above 10 embodiments and various changes and modifications can be made within the spirit and scope of the present invention. Therefore, to apprise the public of the scope of the present invention the following claims are made.

WHAT IS CLAIMED IS:

1. An image reading apparatus for outputting a difference  
between read data acquired by reading an image and reference  
data acquired by reading a reference image as image data,  
5 characterized by comprising:

resolution setting means for setting a resolution in  
the image read;

read data acquiring means for acquiring the read data  
in number corresponding to the set resolution;

10 output clock generating means for generating an output  
clock for outputting the image data in the image read;

dummy clock generating means for generating a dummy  
clock for the output clock when the reference data is to be  
acquired by reading the reference image; and

15 timing setting means for matching a timing of the  
output clock with a timing of the dummy clock in an interval  
during which the image is read and read data is output.

2. The apparatus according to claim 1, characterized in  
that

20 said timing setting means comprises output bit count  
changing means for changing the number of output bits of the  
image data, and

the number of output bits is changed to match the timing  
of the output clock with the timing of the dummy clock.

25 3. The apparatus according to claim 2, characterized in  
that said output bit count changing means can change the



number of bits to one in a serial output form and an integral power of two in a parallel output form.

4. The apparatus according to claim 1, characterized in that

5       said timing setting means comprises output clock frequency changing means for changing a frequency of the output clock, and

10       the frequency of the output clock is changed to match the timing of the output clock with the timing of the dummy clock.

5. The apparatus according to claim 1, characterized in that

15       said timing setting means comprises driving frequency changing means for changing a driving frequency for a sensor for reading the image, and

20       the driving frequency is changed to match the timing of the output clock with the timing of the dummy clock.

6. The apparatus according to claim 1, characterized in that said read data acquiring means does not acquire as the read data a portion in which the timing of the output clock differs from the timing of the dummy clock.

7. An image reading apparatus which is mounted on a printer so as to be interchangeable with a printhead, characterized by comprising:

25       image read means for reading an image of an original placed on said printer;

output means capable of outputting the read image data in a serial output form and a plurality of parallel output forms; and

output form selecting means for selecting the output  
5 form.

8. An image reading apparatus which is mounted on a printer so as to be interchangeable with a printhead, characterized by comprising:

image read means for reading an image of an original  
10 placed on said printer;

clock generating means for generating an output clock for outputting the read image data; and

clock frequency changing means for changing a frequency of the output clock.

15 9. An image reading apparatus which is mounted on a printer so as to be interchangeable with a printhead, characterized by comprising:

image read means for reading an image of an original placed on said printer; and

20 driving frequency changing means for changing a driving frequency for said image read means.

10. An image reading method of outputting a difference between read data acquired by reading an image and reference data acquired by reading a reference image as image data,  
25 characterized by comprising:

the step of setting a resolution in the image read;

the step of acquiring the read data in number  
corresponding to the set resolution;

the step of generating an output clock for outputting  
the image data in the image read;

5 the step of generating a dummy clock for the output  
clock when the reference data is to be acquired by reading  
the reference image; and

the step of matching a timing of the output clock with  
a timing of the dummy clock in an interval during which the  
10 image is read and read data is output.

11. An image reading apparatus characterized by  
comprising:

image read means for reading an image;

serial output means for outputting the image data read  
15 by said image read means in a serial form; and

a plurality of parallel output means for outputting  
the image data read by said image read means in a plurality  
of types of parallel forms.

12. The apparatus according to claim 11, characterized in  
20 that said image read means is mounted on an image reading  
apparatus main body so as to be interchangeable with a  
printhead for printing an image.

13. The apparatus according to claim 11, characterized in  
that said plurality of parallel output means are configured  
25 to output the image data in nth (n is an integer) power of  
two bits.

14. The apparatus according to claim 11, characterized by further comprising switching means for switching said plurality of parallel output means in accordance with a read resolution of said image read means.

5 15. An image reading apparatus characterized by comprising:

image read means for reading an image;

clock generating means for generating a clock signal for outputting the image data read by said image read means;

10 and

clock changing means for changing a frequency of the clock signal in accordance with the read resolution of said image read means.

15 16. An image reading apparatus for outputting a difference between read data acquired by reading an image and reference data acquired by reading a reference image as image data, characterized by comprising:

image read means for reading an image;

20 output clock generating means for generating an output clock signal for outputting the image data read by said image read means; and

dummy clock generating means for generating a dummy clock similar to the output clock signal when the reference image is to be read.

25 17. An image reading apparatus characterized by comprising:

image read means for reading an image; and  
driving frequency changing means for changing a  
driving frequency for a photoelectric conversion sensor  
mounted in said image read means.

- 5 18. An image reading apparatus for outputting a difference  
between read data acquired by reading an image and reference  
data acquired by reading a reference image as image data,  
characterized by comprising:

image read means for reading an image;

- 10 serial output means for outputting the image data read  
by said image read means in a serial form;

a plurality of parallel output means for outputting  
the image data read by said image read means in a plurality  
of types of parallel forms;

- 15 switching means for switching said plurality of  
parallel output means;

output clock generating means for generating an output  
clock signal for outputting the image data read by said image  
read means;

- 20 output clock changing means for changing a frequency  
of the output clock signal;

dummy clock generating means for generating a dummy  
clock similar to the output clock signal when the reference  
image is to be read; and

- 25 driving frequency changing means for changing a  
driving frequency for a photoelectric conversion sensor

mounted in said image read means,

wherein fixed noise is removed from an output signal from said photoelectric conversion sensor by using said serial output means, said parallel output means, said  
5 switching means, said output clock generating means, said output clock changing means, said dummy clock generating means, and said driving frequency changing means.

19. An image reading apparatus characterized by comprising:

10 image read means for reading an image;

clock generating means for generating a clock signal for outputting the image data read by said image read means; and

removing means for removing the image data in a portion  
15 where a read timing of image data from said image read means differs from a timing of the clock signal for outputting the image data.

20. An image reading apparatus for outputting a difference between read data acquired by reading an image and reference  
20 data acquired by reading a reference image as image data, characterized by comprising:

image read means for reading an image;

output clock generating means for generating an output clock signal for outputting the image data read by said image  
25 read means;

clock changing means for changing a frequency of the

clock signal in accordance with a read resolution of said image read means; and

dummy clock generating means for generating a dummy clock having the same frequency as that of the output clock  
5 signal which is changed by said clock changing means when the reference image is to be read.

21. The apparatus according to claim 20, characterized by further comprising dummy data output means for outputting dummy data equivalent to a data output state for each read  
10 resolution of said image read means.

22. An image reading method characterized by comprising:  
the image read step of reading an image; and  
the step of selecting one of output means in a serial  
form and output means in a plurality of types of parallel  
15 forms to output the image data read in the image read step.

23. An image reading method characterized by comprising:  
the image read step of reading an image;  
the clock generating step of generating a clock signal  
for outputting the image data read in the image read step;  
20 and

the clock changing step of changing a frequency of the clock signal in accordance with a read resolution in the image read step.

24. An image reading method of outputting a difference  
25 between read data acquired by reading an image and reference data acquired by reading a reference image as image data,

characterized by comprising:

the image read step of reading an image;

the output clock generating step of generating an output clock signal for outputting the image data read in

5 the image read step; and

the dummy clock generating step of generating a dummy clock similar to the output clock signal when the reference image is to be read.

25. An image reading method characterized by comprising:

10 the image read step of reading an image by using image read means; and

the driving frequency changing step of changing a driving frequency for a photoelectric conversion sensor mounted in the image read means.

15 26. An image reading method of reading an image by using an image reading apparatus which outputs a difference between read data acquired by reading an image and reference data acquired by reading a reference image as image data and includes image read means for reading an image, serial output  
20 means for outputting the image data read by the image read means in a serial form, a plurality of parallel output means for outputting the image data read by the image read means in a plurality of types of parallel forms, switching means for switching the plurality of parallel output means, output  
25 clock generating means for generating an output clock signal for outputting the image data read by the image read means,



output clock changing means for changing a frequency of the  
output clock signal, dummy clock generating means for  
generating a dummy clock similar to the output clock signal  
when the reference image is to be read, and driving frequency  
5 changing means for changing a driving frequency for a  
photoelectric conversion sensor mounted in the image read  
means, characterized by comprising

removing fixed noise from an output signal from the  
photoelectric conversion sensor by using the serial output  
10 means, the parallel output means, the switching means, the  
output clock generating means, the output clock changing  
means, the dummy clock generating means, and the driving  
frequency changing means.

27. An image reading method characterized by comprising:  
15 the image read step of reading an image;  
the clock generating step of generating a clock signal  
for outputting the image data read in the image read step;  
and

the removing step of removing the image data in a  
20 portion where a read timing of image data in the image read  
step differs from a timing of the clock signal for outputting  
the image data.

28. An image reading method of outputting a difference  
between read data acquired by reading an image and reference  
25 data acquired by reading a reference image as image data,  
characterized by comprising:

the image read step of reading an image;

the output clock generating step of generating an output clock signal for outputting the image data read in the image read step;

5           the clock changing step of changing a frequency of the clock signal in accordance with a read resolution of the image read means; and

10           the dummy clock generating step of generating a dummy clock having the same frequency as that of the output clock signal which is changed in the clock changing step when the reference image is to be read.

29.   The method according to claim 28, characterized by further comprising the dummy data output step of outputting dummy data equivalent to a data output state for each read resolution in the image read step.

15       30.   A storage medium storing a control program for controlling an image reading apparatus, characterized in that

the control program comprises:

20           a code for the image read step of reading an image; and

          a code for the step of selecting one of output means in a serial form and output means in a plurality of types of parallel forms to output the image data read in the image read step.

25       31.   A storage medium storing a control program for

controlling an image reading apparatus, characterized in that

the control program comprises:

a code for the image read step of reading an image;

5 a code for the clock generating step of generating a clock signal for outputting the image data read in the image read step; and

10 a code for the clock changing step of changing a frequency of the clock signal in accordance with a read resolution in the image read step.

32. A storage medium storing a control program for controlling an image reading apparatus for outputting a difference between read data acquired by reading an image and reference data acquired by reading a reference image as  
15 image data, characterized in that

the control program comprises:

a code for the image read step of reading an image;

20 a code for the output clock generating step of generating an output clock signal for outputting the image data read in the image read step; and

a code for the dummy clock generating step of generating a dummy clock similar to the output clock signal when the reference image is to be read.

33. A storage medium storing a control program for  
25 controlling an image reading method, characterized in that the control program comprises:

a code for the image read step of reading an image by using image read means; and

a code for the driving frequency changing step of changing a driving frequency for a photoelectric conversion sensor mounted in the image read means.

34. A storage medium storing a control program for controlling an image reading apparatus which outputs a difference between read data acquired by reading an image and reference data acquired by reading a reference image as image data and includes image read means for reading an image, serial output means for outputting the image data read by the image read means in a serial form, a plurality of parallel output means for outputting the image data read by the image read means in a plurality of types of parallel forms, switching means for switching the plurality of parallel output means, output clock generating means for generating an output clock signal for outputting the image data read by the image read means, output clock changing means for changing a frequency of the output clock signal, dummy clock generating means for generating a dummy clock similar to the output clock signal when the reference image is to be read, and driving frequency changing means for changing a driving frequency for a photoelectric conversion sensor mounted in the image read means, characterized in that

the control program comprises

a code for the step of removing fixed noise from an

output signal from the photoelectric conversion sensor by  
using the serial output means, the parallel output means,  
the switching means, the output clock generating means, the  
output clock changing means, the dummy clock generating  
5 means, and the driving frequency changing means.

35. A storage medium storing a control program for  
controlling an image reading apparatus, characterized in  
that

the control program comprises  
10 a code for the image read step of reading an image;  
a code for the clock generating step of generating a  
clock signal for outputting the image data read in the image  
read step; and  
a code for the removing step of removing the image data  
15 in a portion where a read timing of image data in the image  
read step differs from a timing of the clock signal for  
outputting the image data.

36. A storage medium storing a control program for  
controlling an image reading apparatus for outputting a  
20 difference between read data acquired by reading an image  
and reference data acquired by reading a reference image as  
image data, characterized in that

the control program comprises:  
a code for the image read step of reading an image;  
25 a code for the output clock generating step of  
generating an output clock signal for outputting the image

data read in the image read step;

a code for the clock changing step of changing a frequency of the clock signal in accordance with a read resolution of the image read means; and

5 a code for the dummy clock generating step of generating a dummy clock having the same frequency as that of the output clock signal which is changed in the clock changing step when the reference image is to be read.

37. The medium according to claim 36, characterized in  
10 that the control program further comprises a code for the dummy data output step of outputting dummy data equivalent to a data output state for each read resolution in the image read step.

## ABSTRACT OF THE DISCLOSURE

It is an object of this invention to provide an image reading apparatus for performing high-precision image read by canceling out noise based on digital signal processing and superimposed on an effective portion of an analog signal. In order to achieve this object, the image reading apparatus superimposes digital-based data and data-clock-based fixed noise on an sensor output signal in reference data acquiring operation as well to output data with the fixed data being canceled out in image read operation. The number of image read data may greatly differ from the number of data in reference data acquiring operation depending on the resolution, and the dummy clock output timing in reference data acquiring operation may differ from the data output timing in image read operation. To avoid such a situation, appropriate timings are selected/set for each resolution, with the clock output timing in reference data acquiring operation matching the data/clock output timing in image read operation, by selecting the number of data output terminals.

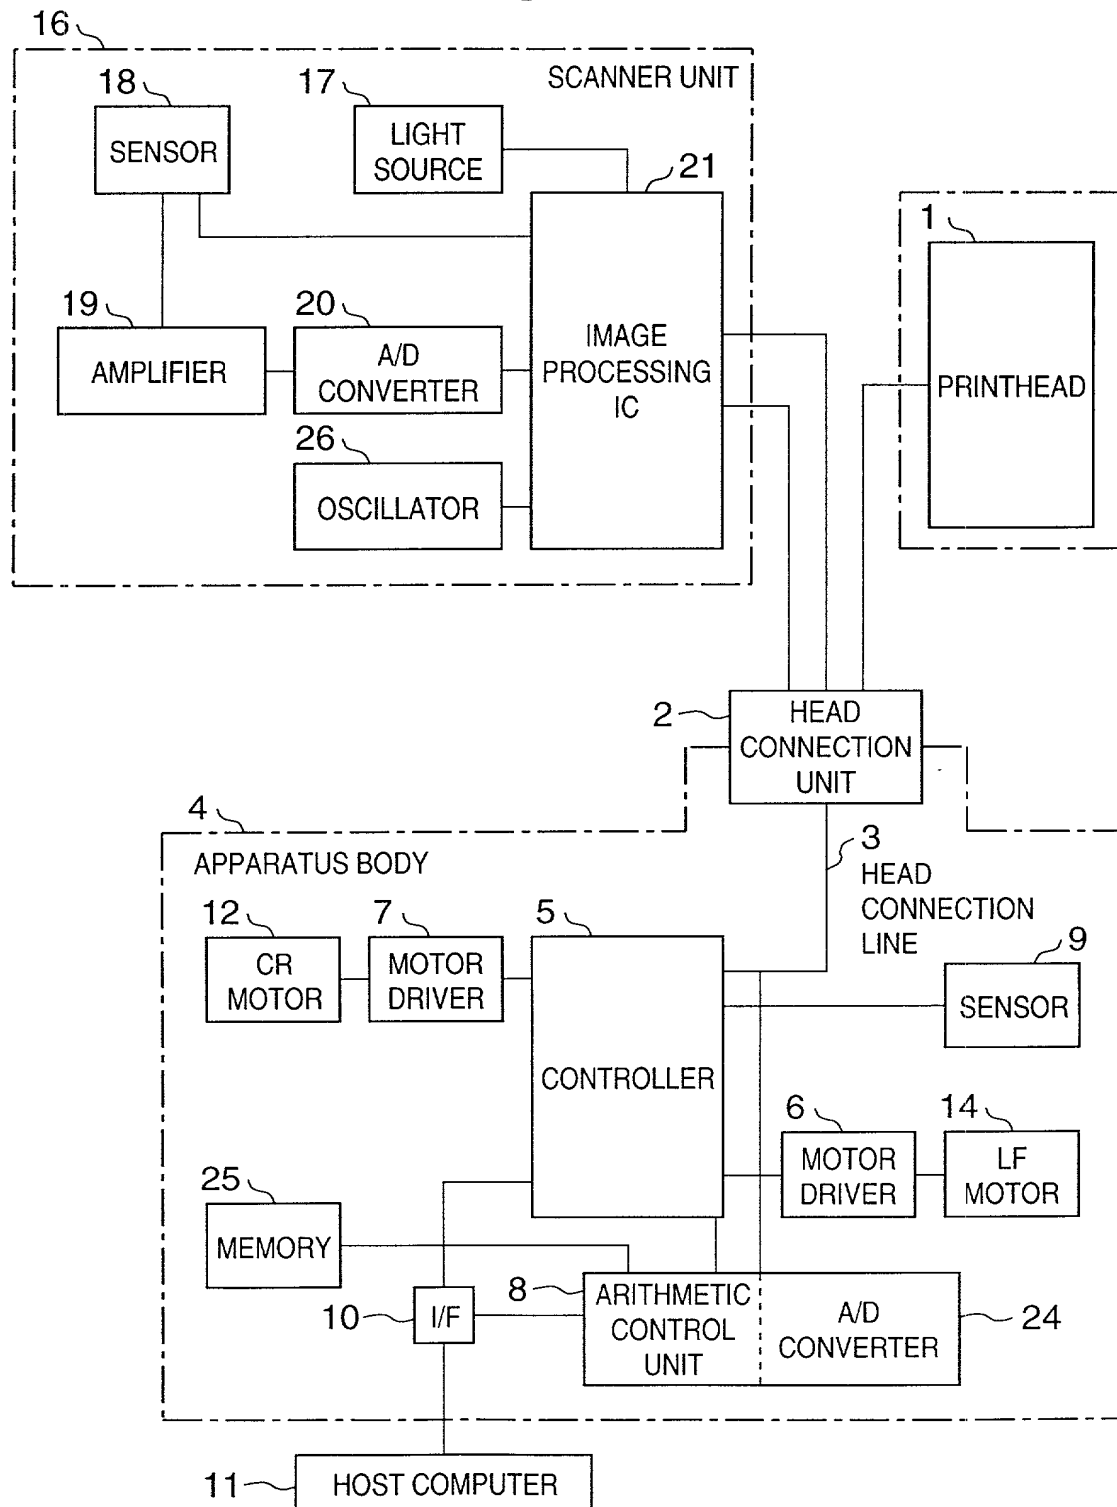
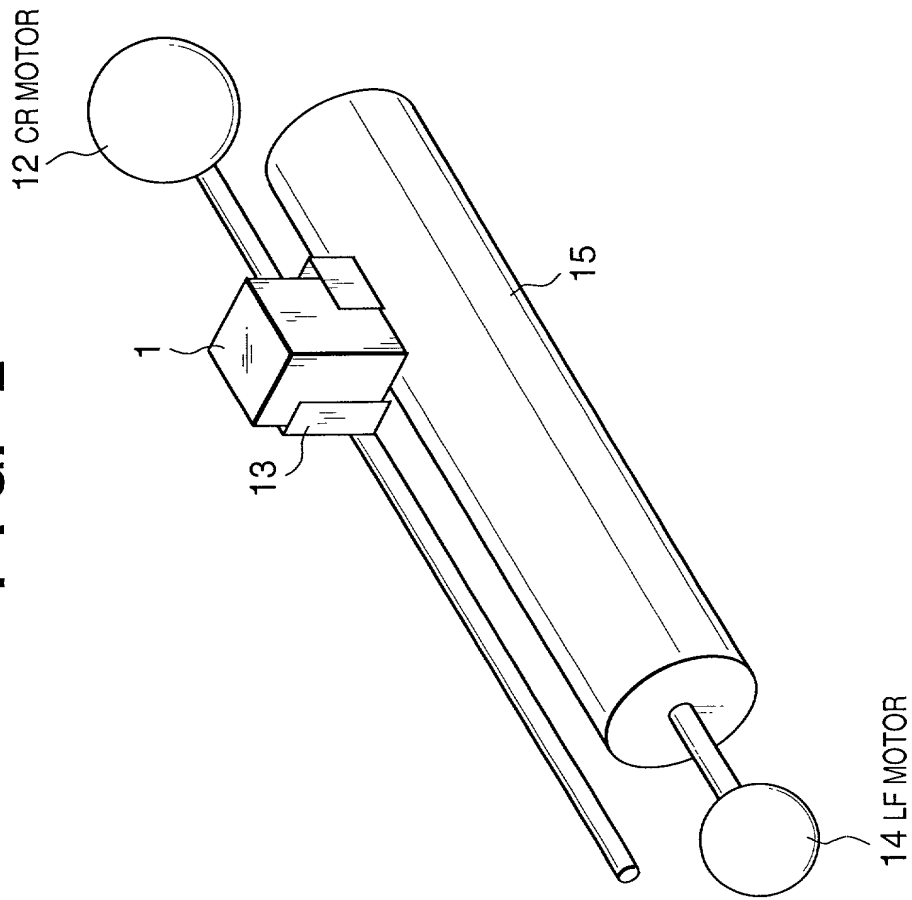
**FIG. 1**



FIG. 2



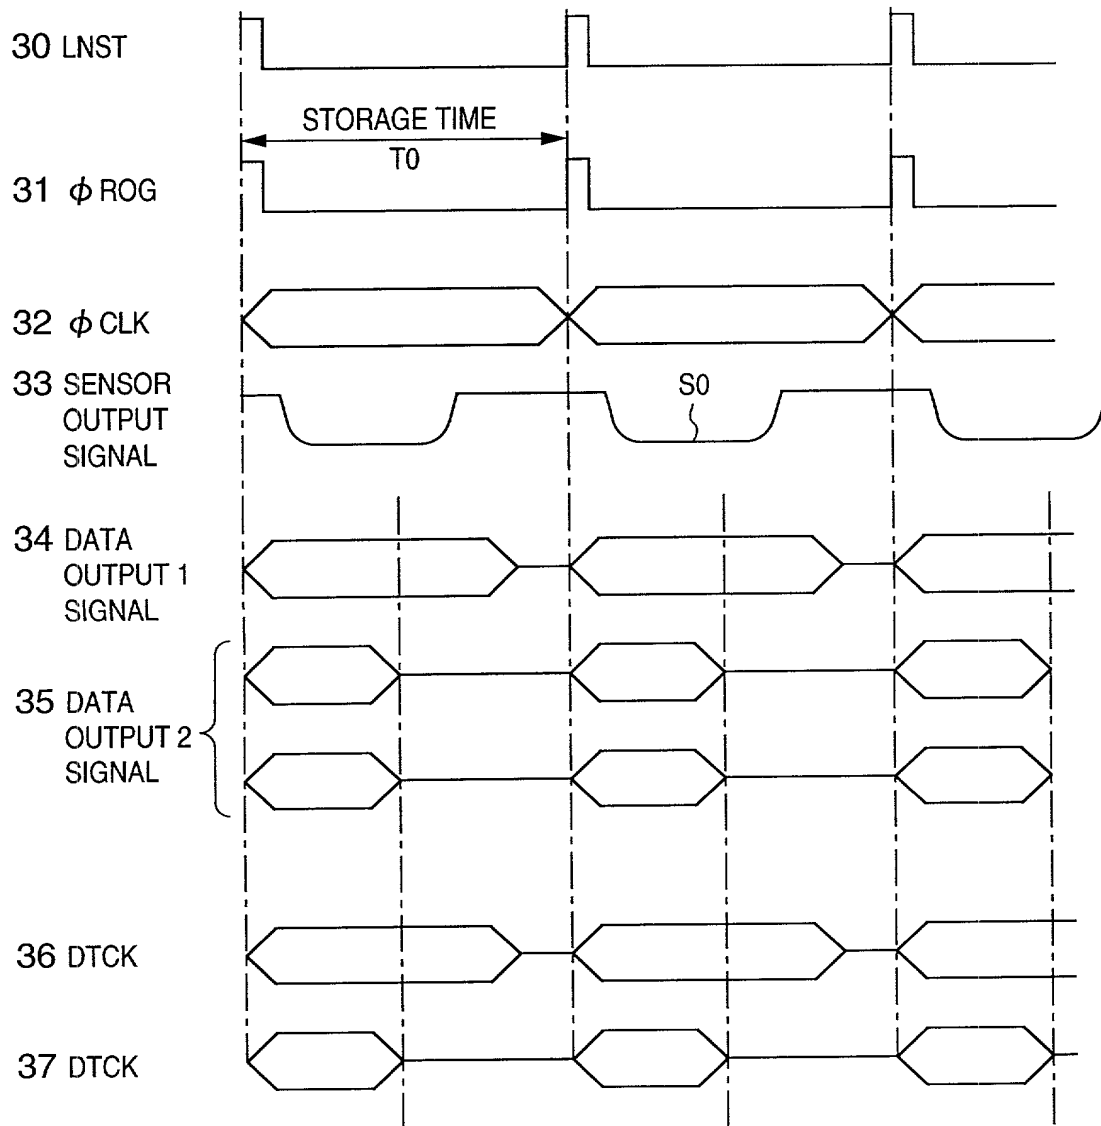
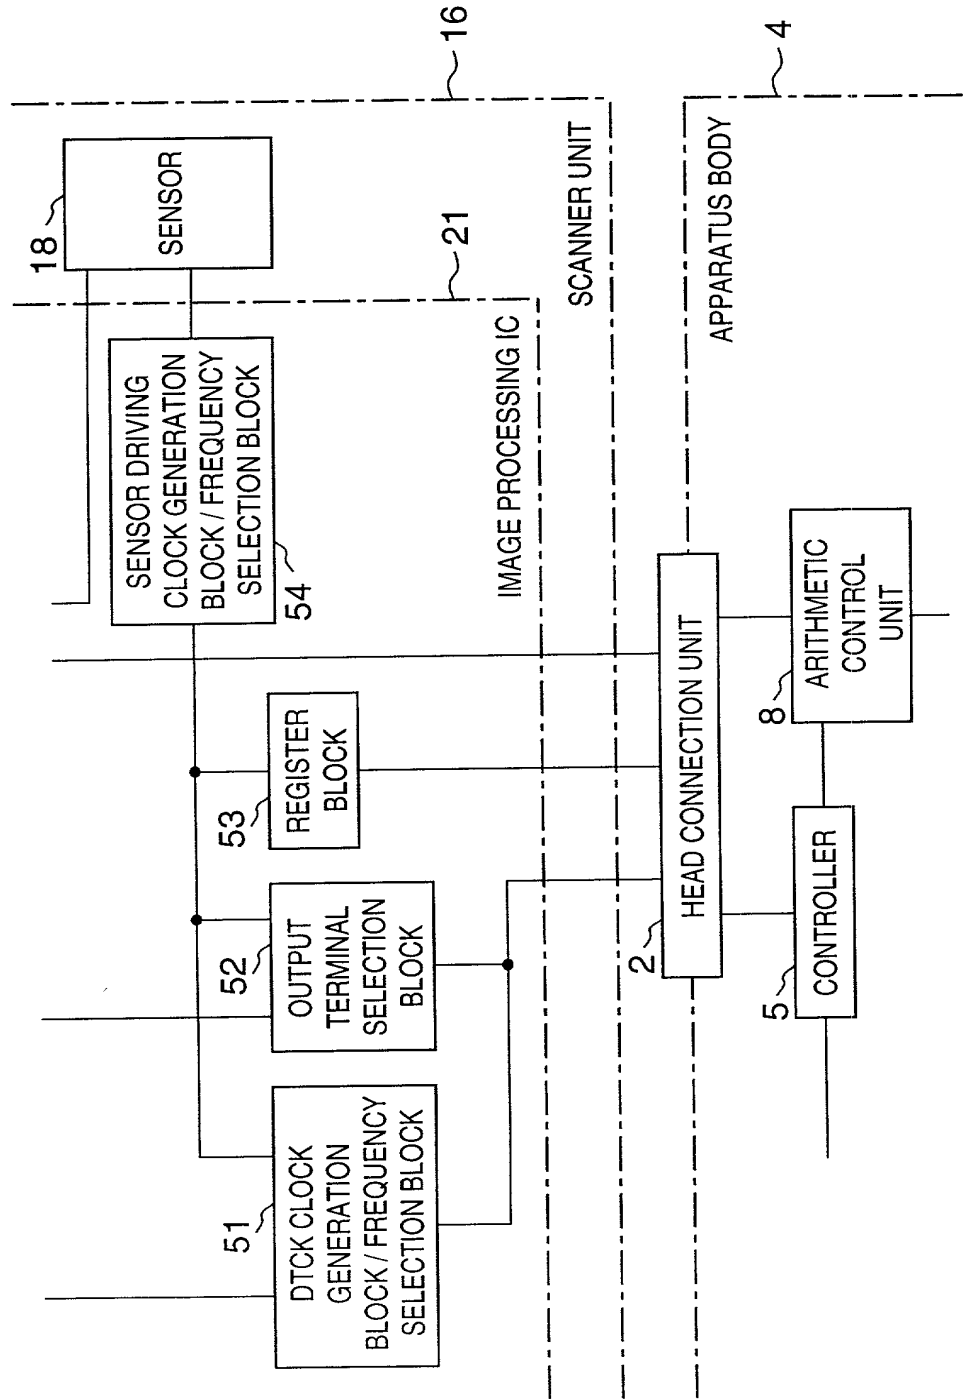
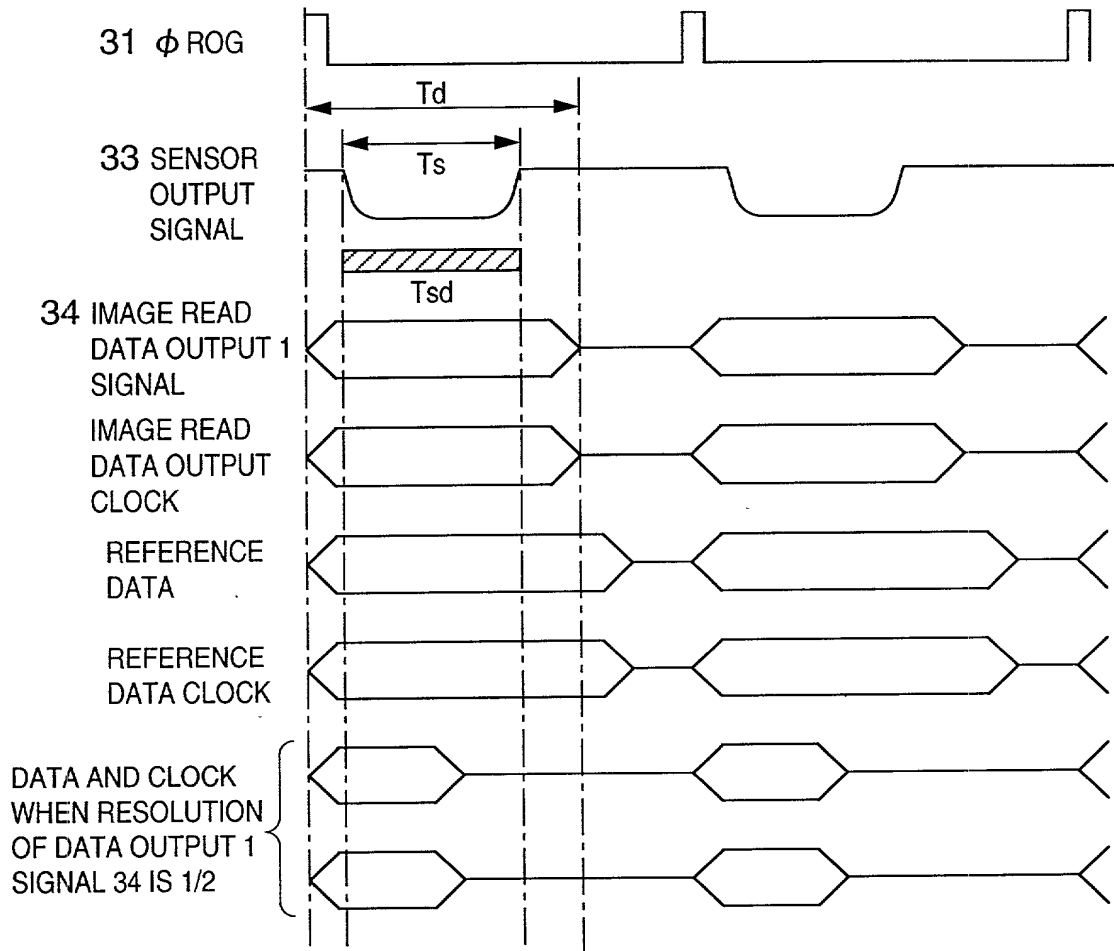
**FIG. 3**

FIG. 4



**FIG. 5**





**FIG. 6**

FIG. 7



**FIG. 8**

**FIG. 9**

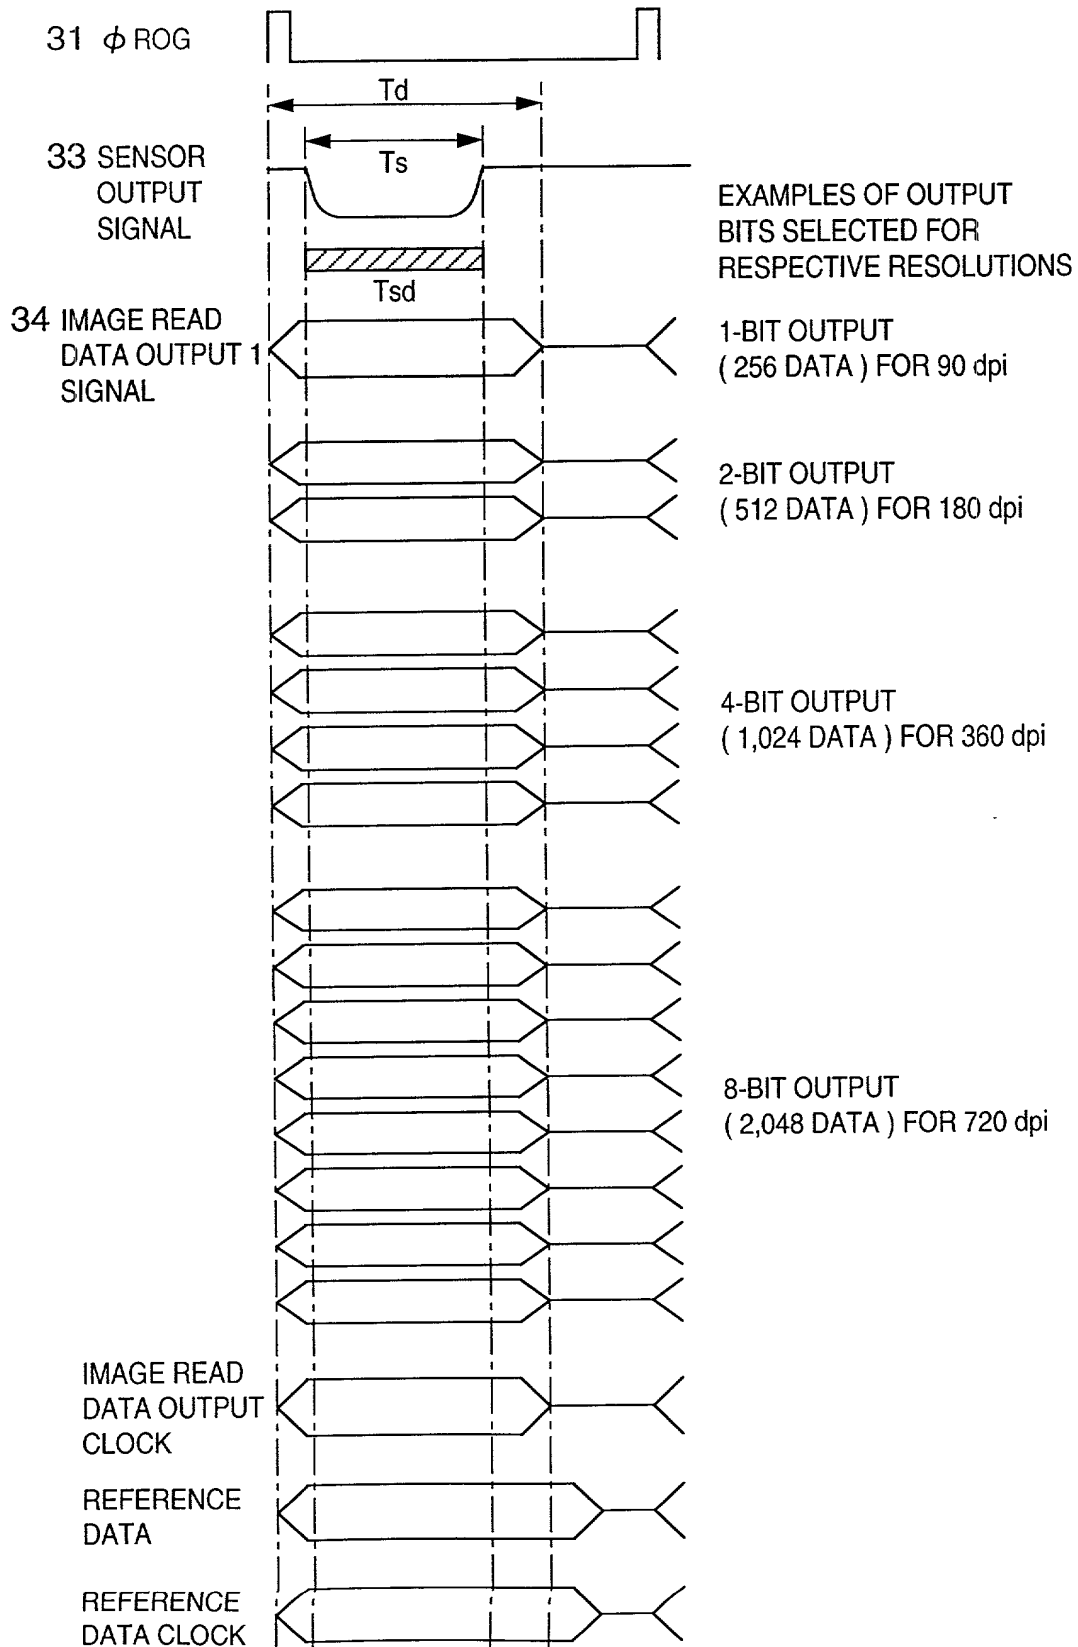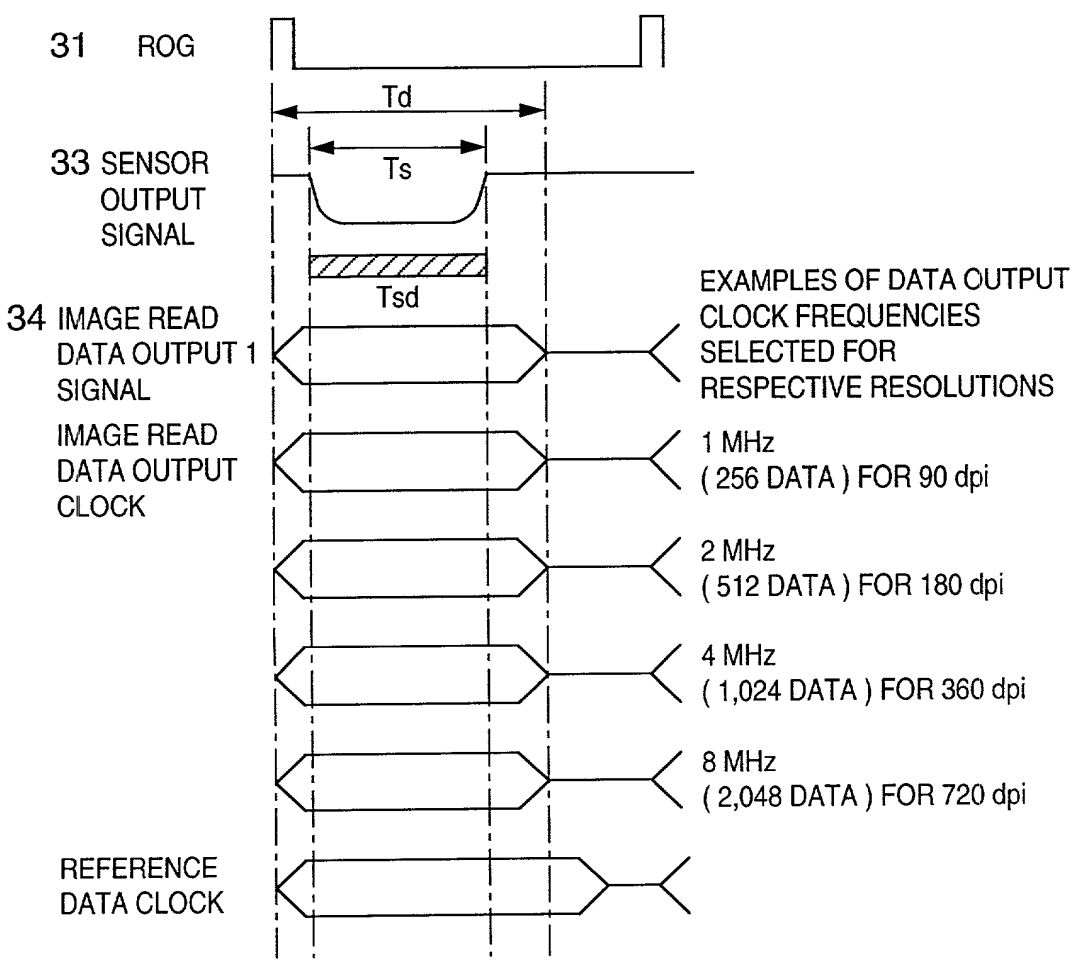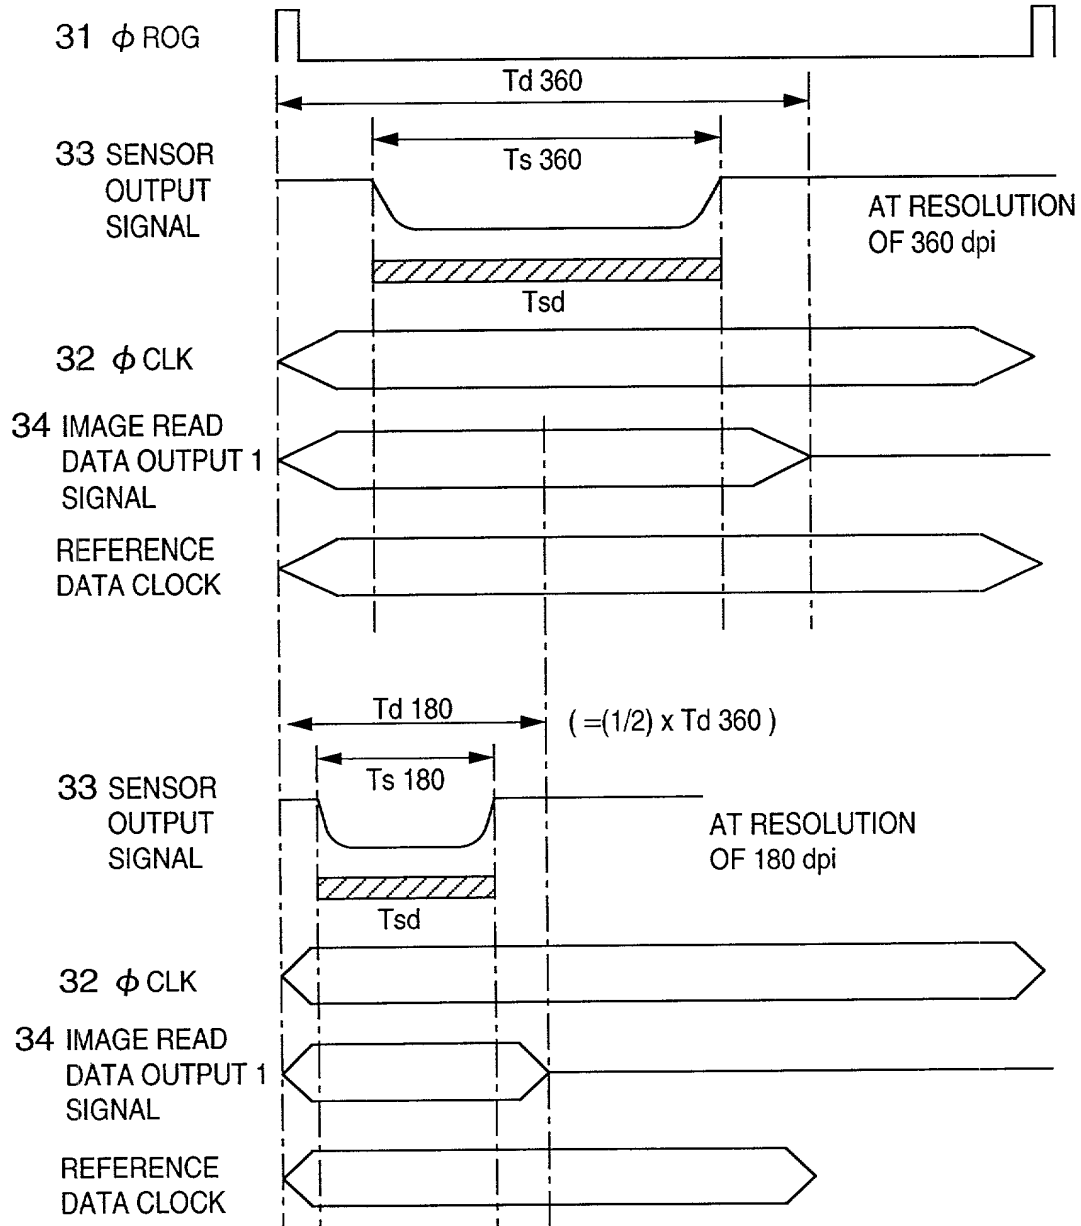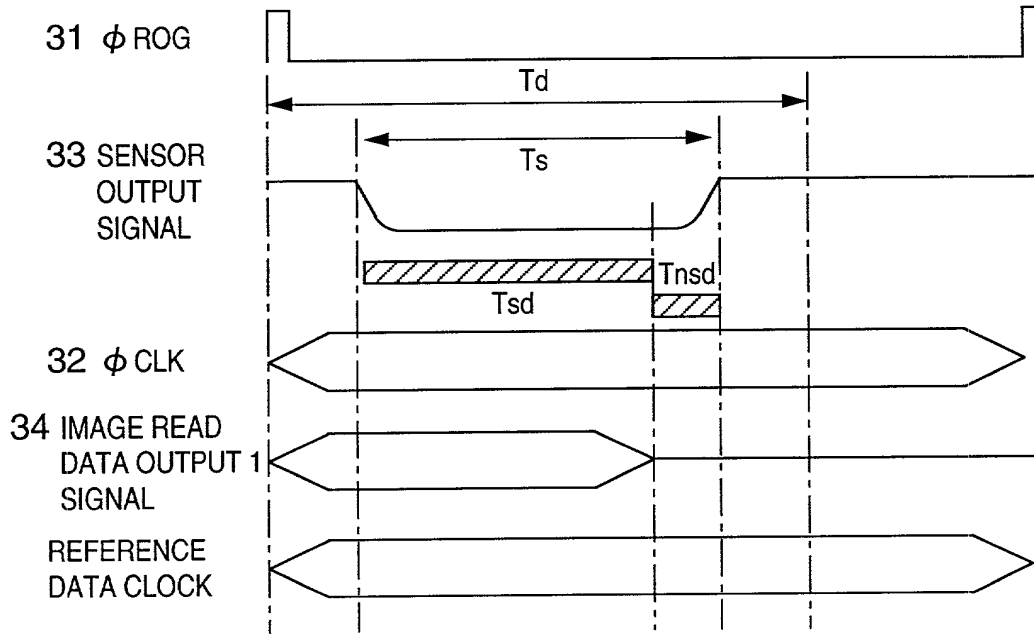

# FIG. 10

